
- 5 year standard warranty
- All stainless steel construction, including fully welded 1/2" stainless steel drain line
- Total thermal performance in high ambient conditions
- No moving parts for increased reliability
- Highest efficiency unit on the market
- Patent Pending cold track system for efficient product cooling
- Compatible with 404A and Glycol systems
- Custom sizes available

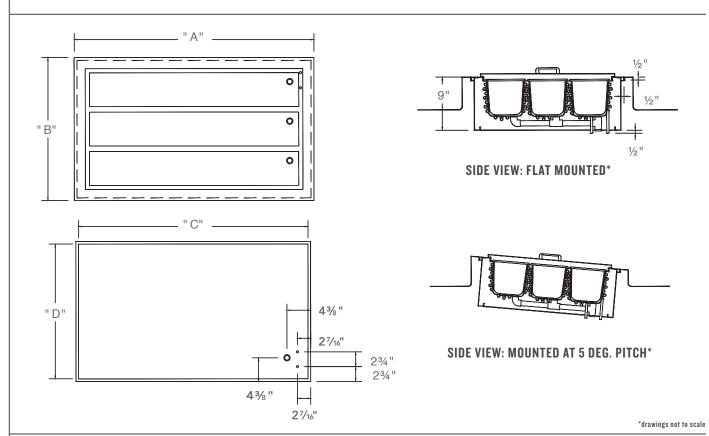

MODEL NUMBER	1/6 PANS CAPACITY	BTU/HR	А	В	С	D
SCSCR-24-1	3	450	241/4"	11½"	231/4"	10½"
SCSCR-24-2	6	675	241/4"	18¾"	231/4"	17¾"
SCSCR-24-3	9	1125	241/4"	25¾"	231/4"	24¾"
SCSCR-44-1	6	900	431/4"	11½"	421/4"	10½"
SCSCR-44-2	12	1350	431/4"	18¾"	421/4"	17¾"
SCSCR-44-3	18	2250	431/4"	25¾"	421/4"	24¾"
SCSCR-69-1	10	1500	68¾"	11½"	67¾"	10½"
SCSCR-69-2	20	2250	68¾"	18¾"	67¾"	17¾"
SCSCR-69-3	30	3750	68¾"	25¾"	67¾"	24¾"